

## Lateral Plungers • smooth, without seal, with female thread - INCH

EH 2B150.



### Product Description

To be used for positioning and applying pressure, e.g. during painting and sandblasting.

#### Material

##### Body

- Aluminium Al

##### Threaded washer

- Steel, blackened

##### Spring

- Stainless steel
- Steel, blackened
- Steel, zinc-plated by galvanization

#### Assembly

Formula for calculating the center distance for the mounting hole:

$$l_0 = z/2 + w + x,$$

$l_0$  = center distance,

$y$  = workpiece height,

$w$  = workpiece length,

$x$  = stroke,

$z$  = stop diameter

Calculation dimension  $x$  for workpieces:

$$x = d_2/2 - s$$

Installation by pressing in.

#### Characteristic

Version light spring load = spring from stainless steel

Version standard spring load = spring from steel, blackened

Version heavy spring load = spring from steel, zinc-plated by galvanization

#### More information


#### Notes

Individual set screws can be screwed in the plate with threaded hole.

#### Further products

- Eccentric Mounting Bushings, for lateral plungers, smooth - INCH


### Drawing

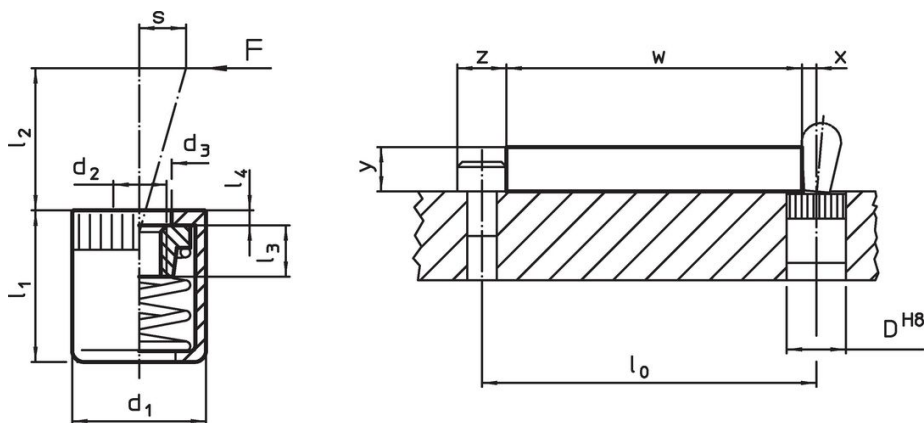

### Order information



Dimensions		Spring load F max. <sup>1)</sup> ~ [lb]	d <sub>3</sub> +0.008	Dimensions				Stroke s [in]	Location hole D H8 [in]	T <sub>max.</sub> [°F]	[oz]	Art. No.
d <sub>1</sub>	d <sub>2</sub>			l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>					
[in]	[in]	[lb]		[in]	[in]	[in]	[in]	[in]	[°F]	[oz]		
Light spring load												
7/16	#8-32	4.5	0.248	0.433	0.157	0.177	0.047	0.063	7/16	482	0.081	2B150.1020
7/16	#8-32	9.0	0.248	0.433	0.295	0.177	0.047	0.079	7/16	482	0.081	2B150.1025
5/8	1/4-20	22.5	0.409	0.669	0.453	0.295	0.067	0.126	5/8	482	0.369	2B150.1040

<sup>1)</sup> statistical average value

Dimensions		Spring load F max. <sup>1)</sup> ~ [lb]	d <sub>3</sub> +0.008	Dimensions				Stroke s [in]	Location hole D H8 [in]	max. [°F]	 [oz]	Art. No.
d <sub>1</sub> [in]	d <sub>2</sub>			l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>					
<b>Standard spring load</b>												
7/16	#8-32	11.2	0.248	0.433	0.157	0.177	0.047	0.063	7/16	482	0.088	<a href="#">2B150.1021</a>
7/16	#8-32	16.9	0.248	0.433	0.295	0.177	0.047	0.079	7/16	482	0.092	<a href="#">2B150.1026</a>
5/8	1/4-20	34.0	0.409	0.669	0.453	0.295	0.067	0.126	5/8	482	0.319	<a href="#">2B150.1041</a>
<b>Heavy spring load</b>												
7/16	#8-32	22.5	0.248	0.433	0.157	0.177	0.047	0.063	7/16	482	0.095	<a href="#">2B150.1022</a>
7/16	#8-32	34.0	0.248	0.433	0.295	0.177	0.047	0.079	7/16	482	0.100	<a href="#">2B150.1027</a>
5/8	1/4-20	45.0	0.409	0.669	0.453	0.295	0.067	0.126	5/8	482	0.342	<a href="#">2B150.1042</a>

<sup>1)</sup> statistical average value

### Accessories

	Dimensions d <sub>1</sub> [in]	 [oz]	Art. No.
<b>assembly tool</b>			
	7/16	1.749	<a href="#">22150.0831</a>
	5/8	3.749	<a href="#">22150.0833</a>

### Compliance

For detailed compliance information please select the desired article number.