# Mounting Pads ⋅ with fastening holes 22590.0720



# **Product Description**

Mounting pads can be used as foot or thrust pad. Not parallel bearing surfaces up to 15° degrees can be compensated.

Including two fastening holes in pad.

#### **Ball element**

· Stainless steel 1.4305


• Stainless steel 1.4305


### More information

#### **Notes**

For the versions  $d_1$  = M10 and M12 the lock nut conforms to DIN 934.

## **Drawing**






## **Order information**

Dimensions							ws	Load capacity	Ĭ	Art. No.
d₁	d <sub>2</sub> -0.5	d <sub>3</sub>	l <sub>3</sub>	h₁ ~	h <sub>2</sub>	t		for static load max.		
[mm]							[mm]	[kN]	[g]	
pad and ball element from stainless steel – picture 1										
	80	9	64	42	16.5	17	30	44	784	22590.0720

# **Application example**

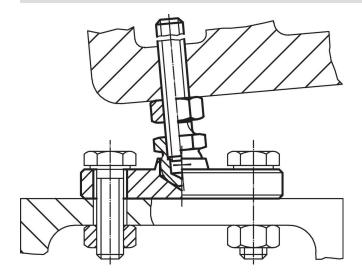

Erwin Halder KG

Page 1 of 2 www.halder.com Published on: 10.8.2024

# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

## Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 27.06.2024.

### Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Erwin Halder KG

www.halder.com Page 2 of 2

Published on: 10.8.2024