# **Ball Casters** • screwable, plain bearing 22752.0081



# **Product Description**

For positioning and aligning of workpieces.

Because of the slide bearing, the ball can roll permanently, and the surface of the workpiece is

At temperatures > 20°C, the carrying figure decreases linearly. (Example: at 90°C the load bearing capacity is max. 60%)

#### Material

### **Bearing**

· plastic

#### Ball

· Ball-bearing steel, hardened

#### Screw


· Free cutting steel, blackened

## More information

#### **Notes**

Special types on request.


# **Drawing**



# **Order information**

d <sub>1</sub>	Dime	nsions Ball diameter	ws	Static carrying figure C₀	Tightening torque max.	min.	max.	ă	Art. No.
[mm]		[mm]	[N]	[Nm]	[°C]		[9]		
Free cutting steel									
M8	10	3.5	1.5	336	0.28	-50	90	2.4	22752.0081

# **Application example**

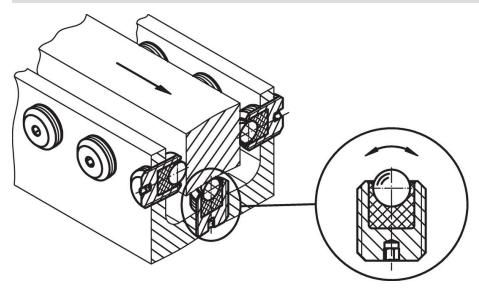

Erwin Halder KG

www.halder.com Page 1 of 2

Published on: 10.8.2024

# Compliance

# **RoHS** compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

## Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 27.06.2024.

### **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2
Published on: 10.8.2024

Erwin Halder KG