# Eccentric Quick Clamps • with screw 23390.0023



### **Product Description**

For quick and easy clamping and releasing of workpieces. When using the "adjustable" design (picture 2) the lever position can be moved.

#### Material

# Support washer

· Thermoplastic PA, glass-fiber reinforced

· Zinc die-cast, plastic coated, black, similar to RAL 9005

#### Inner parts

• Steel, zinc-plated by galvanization


#### Screw


• Steel, zinc-plated by galvanization

#### Adjusting nut

Steel, zinc-plated by galvanization

#### **Drawing**






#### **Order information**

Dimensions							Stroke s		ı	Art. No.
1	d <sub>2</sub>	h <sub>1</sub> max. in clamping position	d <sub>3</sub>	d <sub>5</sub>	h <sub>2</sub> max.	b	at 90° lever position	max.		
[mm]							[mm]	[°C]	[g]	
with screw – picture 1, Steel										
82	M8	40	20	22.5	19.5	20	1	80	136	23390.0023



www.halder.com Page 1 of 2 Published on: 10.8.2024

## **Application example**

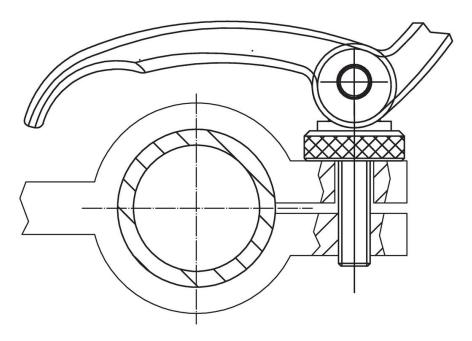

## Compliance

# RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

#### Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 27.06.2024.

#### **Contains Proposition 65 substances**



Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



Page 2 of 2 Published on: 10.8.2024