Adjustable Clamping Levers • with axial bearing, with screw 24420.0348



Product Description

Adjustable clamping levers find versatile applications when the area of use is confined or a specific lever position is required.

serration

- Advantages of axial bearing:
- Double clamping force with same lever size, by reducing the surface friction.
- Protection of workpiece by a fixed locating surface.
- Little setting due to higher pre-clamping force of bolt, e.g. thread.

Material

Lever

 Zinc die-cast, plastic coated, black, similar to RAL 9005, matt structure

Inner parts


Steel, nitrided, blackened

Screw

· Steel, nitrided, blackened

Operation

By lifting the lever the serrations are disengaged. The lever can be positioned by the serrations. On releasing the lever, the serrations are automatically re-engaged.

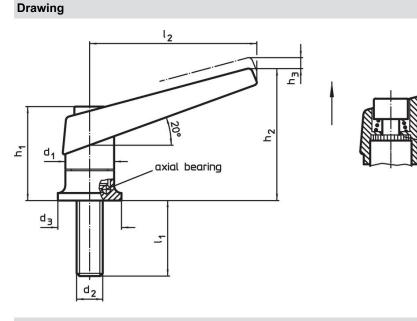


Order information

Dimensions								I	Art. No.
d ₁	d ₂	l ₁	d ₃	h ₁	h ₂	h ₃	l ₂	_	
	[mm]							[9]	
black									
30	M12	50	35	56.5	82	5	108	418	24420.0348

Application example

Increase of clamping force with axial bearing (while manual force is unchanged)

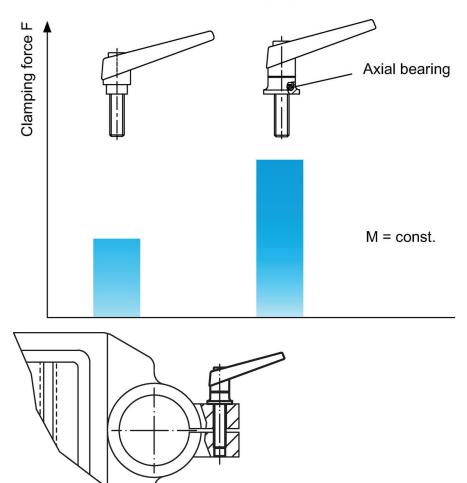

Compliance

RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 27.06.2024.

Contains Proposition 65 substances

Lead can cause cancer and reproductive harm from exposure https://www.P65Warnings.ca.gov/

Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.