# Hinges

# 25165.2025



# **Product Description**

The different versions cover many applications that require a low load.

These metal hinges are characterised by their simple design and the different versions:

- · without bores
- · with bores
- · with bores for countersunk screws

The version without bores can be assembled by welding or by inserting a specific drilling pattern.

#### Material


#### Body

Steel, zinc-plated by galvanization, passivated

#### Axis

· Stainless steel 1.4301

# **Drawing**

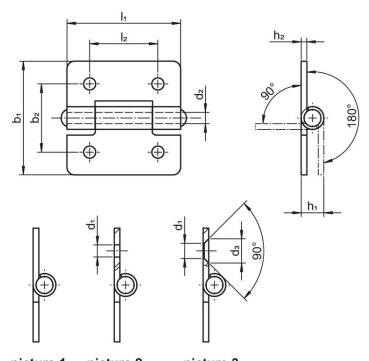


picture 1

picture 2

picture 3

Erwin Halder KG

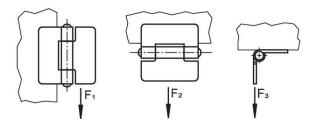

### **Order information**

Dimensions									Holding force			I	Art. No.	
b <sub>1</sub>	I <sub>1</sub>	b <sub>2</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	h <sub>1</sub>	h <sub>2</sub>	l <sub>2</sub>	F <sub>1</sub>	F <sub>2</sub>	F <sub>3</sub>	_		
						~			~	~	~			
				[mm]		[N]			[g]					
with bores	with bores for countersunk screws – picture 3, Steel													
40	40	25	5	4	8.3	8	2	25	2000	1000	1000	33	25165.2025	

www.halder.com Page 1 of 2

Published on: 10.8.2024

# Compliance

# **RoHS** compliant

Compliant according to Directive 2011/65/EU and Directive 2015/863.

### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 27.06.2024.

#### Does not contain Proposition 65 substances

No Proposition 65 substances included. https://www.P65Warnings.ca.gov/

#### **Free from Conflict Minerals**

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.



www.halder.com Page 2 of 2
Published on: 10.8.2024