

**Monitoring Units** · for positioning sensors, pneumatic  
EH 22800.



**Product Description**

The monitoring unit is used in combination with positioning sensors (EH 22800). Together with the positioning sensors, the backwash pressure sensor makes it possible to poll the correct workpiece positioning.

**Material**


- Housing
  - plastic

**More information**

**Notes**

Further information on request.

**Drawing**

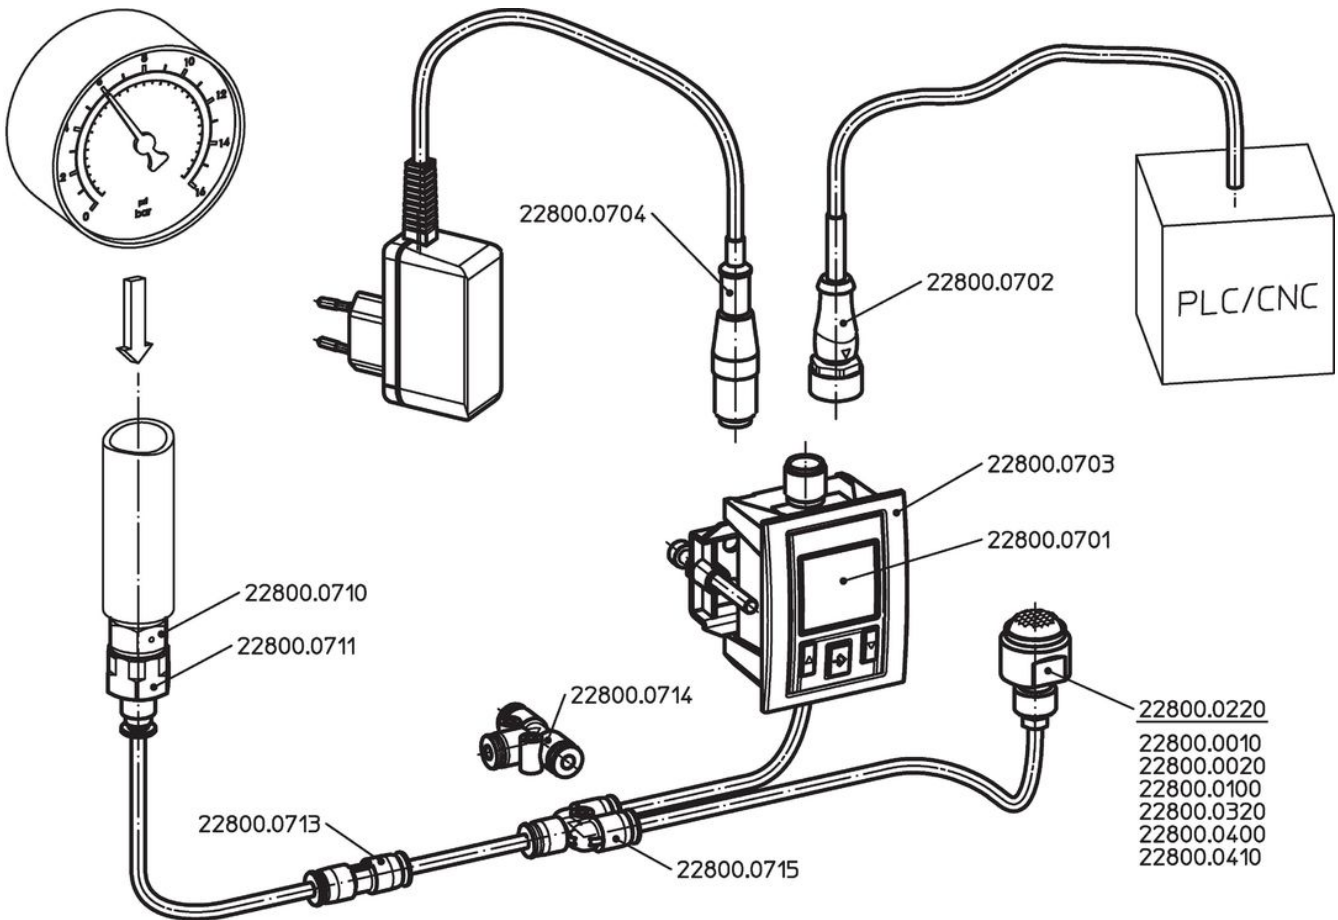

**Order information**

Working pressure [bar]	[g]	Art. No.
0 – 10	162	22800.0701

backwash pressure sensor with LCD display, Ø 4 mm pneumatic hose connection, analogue and digital output signals

Accessories

	L [mm]	D [mm]	W [g]	Art. No.
<b>circular connector cable for connecting backwash pressure sensor to control / bus system, M12 connection on free cable end (4-pin)</b>				
	2000	-	84.0	22800.0702
<b>installation frame for backwash pressure sensor, for installation into a control panel (max. wall thickness 5 mm)</b>				
	-	-	26.0	22800.0703
<b>plug-in power supply, input 100-240 V AC / output 24 V DC 500 mA, with M12 plug socket</b>				
	1500	-	100.0	22800.0704
<b>pressure regulator, max. input pressure 12 bar / output pressure 2 bar, 1/4" male thread two-sided</b>				
	-	-	22.0	22800.0710
<b>connection piece for connecting pressure regulator and pneumatic hose, 1/4" female thread on push-in connector (pneumatic hose Ø 4 mm)</b>				
	-	-	17.0	22800.0711
<b>pneumatic hose Ø 4 mm</b>				
	5000	4	43.0	22800.0712
<b>push-in connector, for pneumatic hose Ø 4 mm</b>				
	-	-	4.7	22800.0713
<b>T-push-in connector for pneumatic hose Ø 4 mm</b>				
	-	-	7.6	22800.0714
<b>Y-push-in connector for pneumatic hose Ø 4 mm</b>				
				

## Compliance

For detailed compliance information please select the desired article number.