

Spring Plungers · with pin and internal hexagon - INCH  
2B030.0082



**Product Description**


To be used for positioning, indexing, locking, latching as well as for other similar pressure applications.  
Spring plungers can be used for locating or for applying pressure, as a detent or for ejection.

**Material**

- Pin**
  - Free cutting steel, hardened, blackened
- Body**
  - Free cutting steel, blackened
- Spring**
  - Stainless steel

**Characteristic**

Heavy spring load: marked with two lines



**More information**

**Notes**

Customized design on request.  
Spring plungers are specially tested for spring range and forces.  

- This product is manufactured in INCH dimensions.


**References**

A conversion table can be found in the technical data following these product information pages.  
Thread lock: polyamide spot coating (for details please refer to the technical appendix).

**Further products**

- Spring Plungers, with pin and internal hexagon

**Drawing**

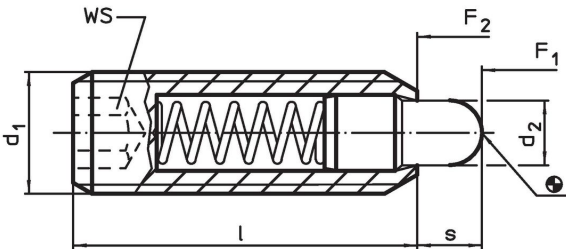

**Order information**

Dimensions				WS	Stroke s	Spring load <sup>1)</sup>		Temperature		oz	Art. No.		
d <sub>1</sub>	Thread	d <sub>2</sub>	l			F <sub>1</sub> ~	F <sub>2</sub> ~	min.	max.				
[in]		[in]	[in]	[in]	[in]	[lb]	[°F]						
<b>free cutting steel, heavy spring load, Without thread lock</b>													
5/8-11	5/8	0.625	2A-UNC	0.31	1 1/2	5/16	0.313	10.5	22.2	-22	482	1.245	<b>2B030.0082</b>

<sup>1)</sup> statistical average value

## Application example



## Compliance

### RoHS compliant

Contains lead - compliant according to exceptions 6a / 6b / 6c.

### Contains SVHC substances >0,1% w/w

Contains lead - SVHC list [REACH] as of 27.06.2024.

### Contains Proposition 65 substances



Lead can cause cancer and reproductive harm from exposure  
<https://www.P65Warnings.ca.gov/>

### Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.